

Residential Warranty









FEATURES



Modern & Stylish

A stylish slim line single piece unit incorporates a top-mounted compressor with compact footprint



Highly Efficient

Produces significantly more heat energy than the power input; saving on purchased energy



Handy Controller

Providing intuitive operation & helpful functions such as temp setting, timer & safety lock



Built in Frost Protection

Protecting the condenser from icing for complete peace of mind

Harvest the free energy with the advanced Smart Lifestyle Australia heat pump.

This renewable energy water heating technology uses up to 75% less energy than a conventional water heater, whilst providing reliable hot water all day and night.

Smart Technology

Heat pumps utilise an ingenious technology to efficiently transfer thermal energy directly from the surrounding air and into the water, and so do not rely on direct sun or fossil fuels to provide an energy source.

AIR Heat Pump extracts around 3kW from surrounding air.




Did you know?

A heat pump is like an energy multiplier. From 1 kW of power input, it can create over 4 kW's of output heat2. That's a performance efficiency of a remarkable 400%. Where as conventional electric storage water heaters can only convert 1 kW of input power into a maximum of 1 kW of output heat.

Energy Efficiency

Did you know?

Water heating accounts for nearly a quarter of the energy use and greenhouse gas emissions in the average Australian home.

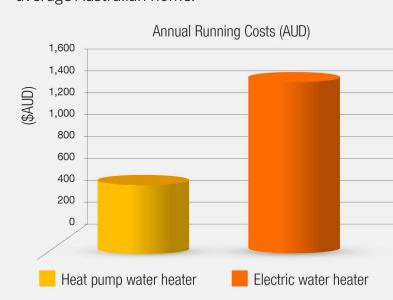

*Estimations based on SLA-R18-300D/N3A4 in zone 3 under medium load, obtained from independent laboratory test results and followed by TRNSYS modeling and a retail electricity cost of \$0.30c per KWh.





Smart Technology

With a Smart Lifestyle Australia heat pump, set up and operation monitoring is made simple thanks to an amazing, in built user-friendly

Operational modes

ECO (Heat Pump Only) mode: The standard mode where the highest efficiency is achieved

Hybrid Mode: The Heat Pump & E-heater operate together to ensure the set temperature is achieved.

E-Heater: When the air temperature drops to below -7°C, the heat pump will automatically select E-heater mode for an electric hot water



Wide Operating Range Operates as low as 5°C

in ECO mode & between -20°C & 45°C with additional E-heat boost



Tank-Wrapped Condenser Coil

For efficient heat transfer & preventing water contamination



Auto Disinfection

Providing intuitive operation & helpful functions such as temp setting, timer & safety lock






Power Outage Protecting the condenser from icing for complete



Low Operating

Operating at a very low 48/49 dBA you will hardly know it's there!

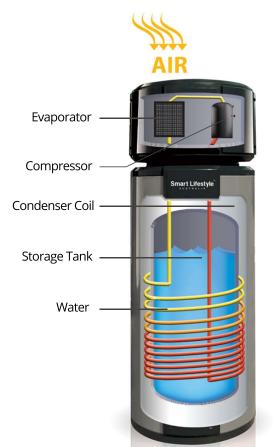

How it Works

- 1. A fan draws in air, containing heat energy, across the evaporator
- 2. The evaporator turns the liquid refrigerant into a gas
- 3. The compressor pressurises the refrigerant into a hot gas
- 4. The hot gas inside the condenser coil heats the water inside the coil-wrapped tank
- 5. The refrigerant reverts back to a liquid after heating the water and continues to the evaporator for the process to start again

An energy efficient hot water system such as the Smart Lifestyle Australia heat pump is a great way for households to make substantial reductions in their energy consumption and cost of living.

A heat pump provides a quick and easy replacement of your old energy-hungry electric water heater, whilst also reducing CO2 emissions by over 4 tonnes, and saving you up to \$900* per year.

Product Specifications

MODEL		Unit	SLA-R18-190D/N3A4	SLA-R25-300D/N3D4	SLA-R25-300D/N3D4C		
Power supply			220-240V~, 1Ph, 50Hz	220-240V~, 1Ph, 50Hz	220-240V~, 1Ph, 50Hz		
Nominal tank volume		L	193	193 290			
Heating capacity (Heat pump only)		kW	1.7	2.5	2.5		
EBH (Electric backup heater)		kW	2.0	2.0	2.0		
Input (Heat pump only)		W	465	610	610		
COP			3.65	4.10	4.10		
Current (Heat pump only)		Α	1.94 2.54		2.54		
Max.leaving water temperature (Heat pump only)		°C	60	60	60		
Hot water yield		L/h	36	52	52		
Working ambient temperature (Heat pump only)			-7°C to 40°C	-7°C to 40°C	-7°C to 40°C		
Sound pressure level		dB(A)	48 - 58	48 - 58	48 - 58		
Water resistance			IP×4	IP×4	IP×4		
Refrigerant type			R134a	R134a	R134a		
Throttling type			Electric expansion valve	Electric expansion valve	Electric expansion valve		
Compressor	Brand		GMCC	Panasonic	Panasonic		
	Туре		Rotary	Rotary	Rotary		
Evaporator	Fan		Hydrophilic aluminum	Hydrophilic aluminum	Hydrophilic aluminum		
	Tube		Inner groove copper tube	Inner groove copper tube	Inner groove copper tube		
Fan motor	Speed	rpm	1,200	850	850		
ran motor	Fan Type		Axial	Axial	Axial		
Low pressure protection			Yes	Yes	Yes		
High pressure protection			Yes	Yes	Yes		
Inner tank			Enamel	Enamel	Enamel		
Inlet water pipe connection		mm	G3/4"	G3/4"	G3/4"		
Outlet water pipe connection		mm	G3/4"	G3/4"	G3/4"		
Condensing water connection		mm	1/2", internal thread	1/2", internal thread	1/2", internal thread		
Unit dimension (ΦD×H)		mm	Ф510×2175	Ф640×2,010	Ф640×2,011		
Packing dimension (L×W×H)		mm	590×610×2,360	750×745×2,210	750×745×2,211		
Net / Gross weight		kg	93.5 / 102.5	130 / 144	131 / 144		

Note: The specification may be changed for product improvement, please refer to the nameplate of product. **Condition - Ambient:** 19°C DB/15°C WB, initial water temperature is 14°C, ending water temperature is 55°C.

Model No		SLA-R18-190D/N3A4				SLA-R25-300D/N3D4				SLA-R25-300D/N3D4C						
Certificate type	Zone	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
	44A Gas	-	-	-	4	3	-	-	-	9	5	-	-	-	11	7
VEECs Metro	44B Elec	-	-	-	18	15	-	-	_	36	23	-	-	-	47	37
	44C New	-	-	-	3	2	-	-	-	8	3	-	-	-	9	5
	44A Gas	-	-	-	4	2	-	-	-	8	4	-	-	-	10	6
VEECs Regional	44B Elec	-	-	-	20	16	-	-	-	38	25	-	-	-	49	39
	44C New	-	-	-	3	1	-	-	-	7	3	-	-	-	7	3
	F16 Gas	-	-	8	-	2	-	-	14	-	6	-	-	19	-	8
ESCs Metro	F16 Elec	-	-	38	-	25	-	-	60	-	39	-	-	88	-	62
	F17 New	-	-	6	-	1	-	-	11	-	3	-	-	15	-	5
	F16 Gas	-	-	7	-	2	-	-	13	-	5	-	-	18	-	7
ESCs Regional	F16 Elec	-	-	39	-	25	-	-	62	-	40	-	-	91	-	64
	F17 New	-	-	5	-	1	-	-	10	-	3	-	-	14	-	4
STCs	8-year	20	19	24	25	25	20	20	24	26	25	20	18	23	24	23

^{**}All the above calculation are tentative

Eligible for Government Incentives

The highly energy efficient Smart Lifestyle Australia hot water heat pumps qualifies to generate Small-scale Technology Certificates (STCs) under the Federal Government RET scheme and so Australian consumers can use these to reduce the point of sale price of their heat pump.